

PoolKote **BROCHURE**



Kote[®]

Working for our customers success!

PoolKote

LUXURIOUS POOL PAINT


Gone are the days when you needed to use paints with toxic chemicals or coatings to seal your pool. PoolKote has been formulated to provide both pool specialists and contractors a choice to work with a product that is easy to apply and non-hazardous to both themselves and their team.

Pools are essential in hot sunny climates and nothing can compare to a nice, cool dip in the water after a long day in the hot sun... thus that is the reason we have worked tirelessly to create a stunning and easy to apply pool coating that everyone will love.



PoolKote

THE BREAKDOWN OF POOLKOTE AND ITS PROTOCOLS



SPREADRATE/COVERAGE

PoolKote covers 7 square meters per liter

*You need to apply 1 coat of KonKote prior to application of PoolKote



SELF CLEANING

PoolKote is self cleaning due to its smooth and hydrophobic formula, making it easy to maintain.



PROTOCOL

The PoolKote product will only be effective if you apply no less than 4 coats. You can apply each coat 1 hour apart in good warm weather AFTER applying 1 coat of our primer (KonKote).



THE TOOLS

PoolKote is a water based product, meaning the only liquid you need to clean your paintbrush, roller or spray machine is water



PROPERTIES OF POOLKOTE

PoolKote is an eco-friendly, UV Stable, VOC free, hydrophobic, flexible and easy to apply product that makes it the perfect pool waterproofing coating for any surface.



CURING AND DRYING TIMES

PoolKote requires warmer sunny weather in order to dry and cure. Drying time between coats is 30mins to 1hr, and PoolKote takes 7 full days to cure with no rain.



PoolKote


INNOVATIVE POOL COATING

PoolKote is more accurately termed as a pool sealant or pool coating rather than a paint, even though you paint the coating onto the surface with a paintbrush.

Most pool paints are not always updated with the latest technology and thus are usually outdated.

Kote has focused on providing it's customers with high performance product that actually works.

Meaning PoolKote has been formulated to take advantage of the massive innovative strides in the industry to provide permanent water submersion coatings and additives to the public, making PoolKote one of the best performing coatings available in South Africa.

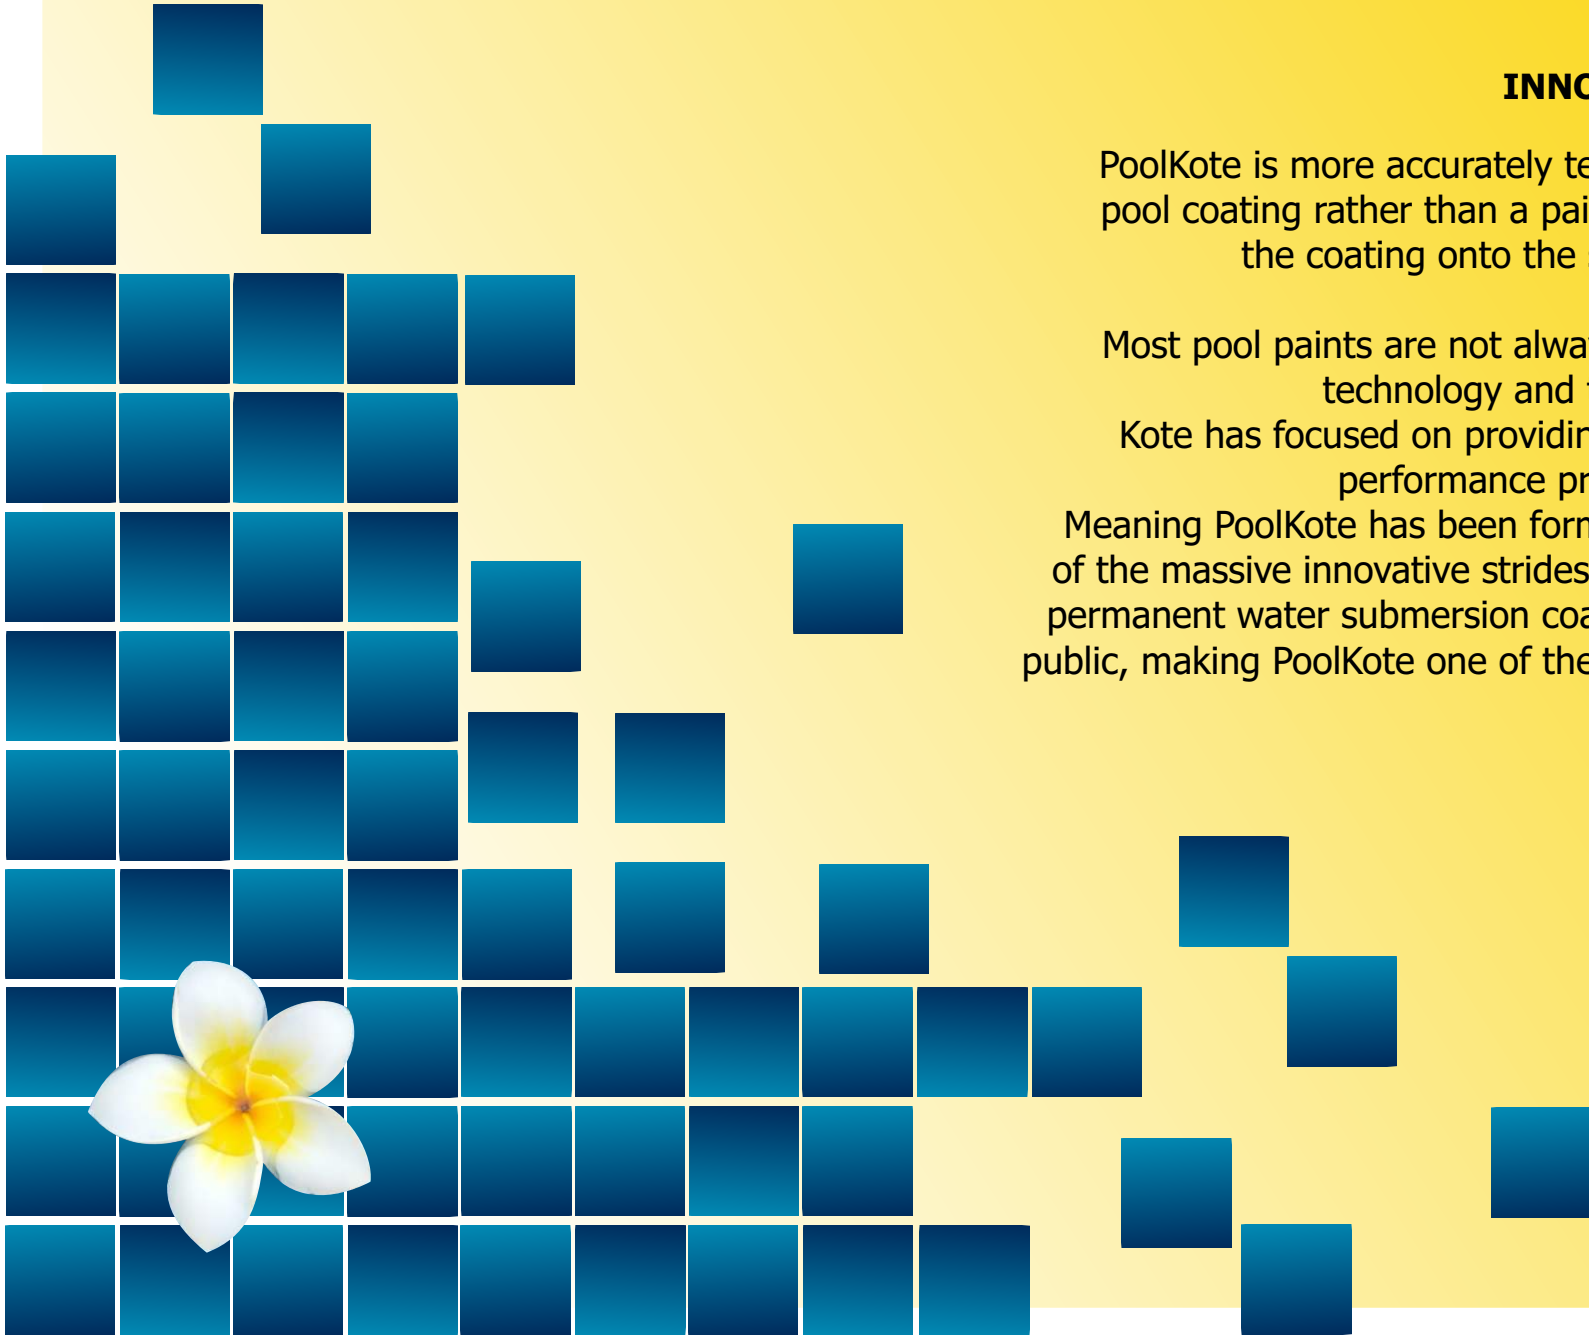

PoolKote

SURFACE PREPARATION

When it comes to properly applying PoolKote to any surface you need to ensure you follow the most important steps and that is the SURFACE PREP.

Cleaning Process: Using KleenKote

Step 1: KleenKote should be applied to the surface liberally. The product can be diluted up to 20% with water if substrate is not too greasy.

Once you have poured a reasonable amount begin the scrubbing process with a broom and make sure to completely clean every surface you intend to apply the primer and PoolKote onto.


Step 2: With a high pressure hose wash away all the KleenKote. You will notice that it will create copious amounts of foam, ensure you rinse the surface continuously till all the soap suds are gone and the water runs clear.

Step 3: Allow the surface to completely dry before moving on to the next phase... applying the KonKote.

Primer Process: Applying KonKote

Step 1: Use a paintbrush/roller or airless spray gun and apply one coat of KonKote.

Step 2: Allow to dry for an hour (1hr) in good warm weather before applying your PoolKote.

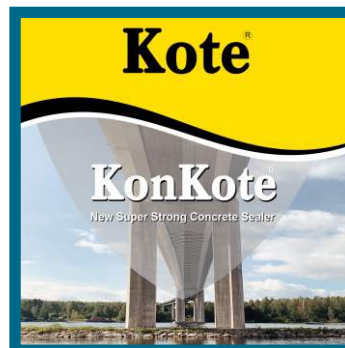

*Instructional videos are available on the Kote website

PoolKote

OUR WARRANTY

We do not offer any guarantees against poor workmanship or surface preparation, therefore it is in your best interests to follow the instructions religiously.

We do however, offer a warranty which covers the curing of PoolKote, if the product fails to cure or dry properly due to defect in the formulation, we will replace the product free of charge.

Please Note: This warranty is not a substitute for workmanship guarantees in any way whatsoever. You will need to ensure you get a contractors warranty.

INSTRUCTIONS

PoolKote must be applied as follows: (please watch video on webpage www.kote.co.za/poolkote)

DO NOT SKIP THE SURFACE PREPARATION PROCESS

Step 1: Make sure the surface of the pool has been properly cleaned and the primer has been applied correctly. The primer, KonKote, should be fully dry before applying the PoolKote.

Step 2: Take the paintbrush or airless spray gun and apply the first layer of PoolKote onto the primed surface of your pool. Allow to dry for 30mins to 1hr depending on the temperature of the day. You should always apply PoolKote in warm dry weather.

Step 3: Repeat Step 2 until you have applied all 4 coats of PoolKote.

Step 4: Allow the PoolKote to fully cure for 7 days without water, rain and/or filling your pool with fresh water. Just like any other product the PoolKote requires 7 days of dry weather to fully cure to ensure that the coating has had a chance to fully cross-link and create a waterproof barrier.



Step 5: Once the 7 days are over, fill your pool and enjoy!





PoolKote

VERSATILE, FLEXIBLE AND WATERPROOF

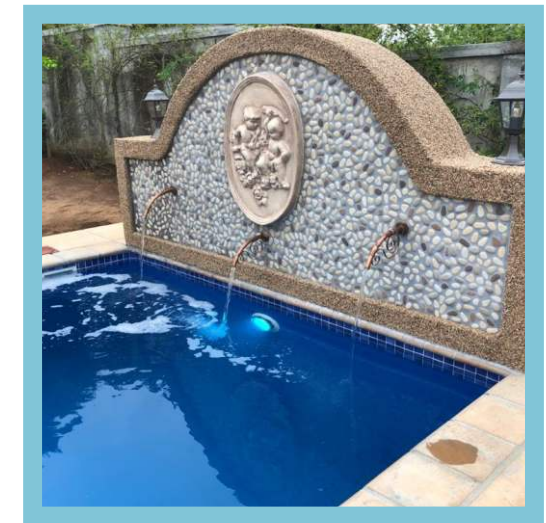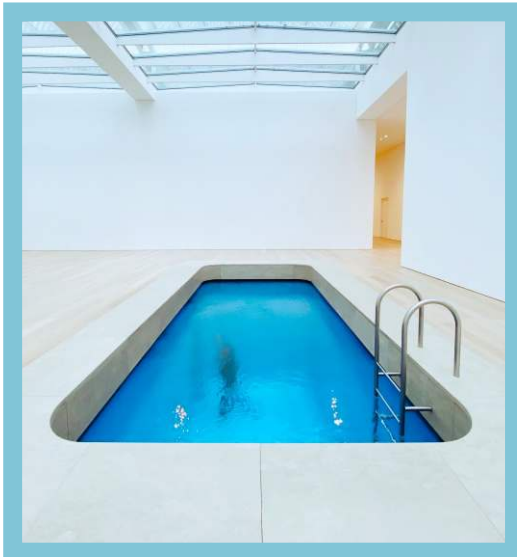

Everyone deserves to have the pool of their dreams...



PoolKote is a product manufactured by Kote Products (Pty) Ltd

Find more information about PoolKote and other Kote Products on our website
or feel free to get in touch via email or simply call

www.kote.co.za - 0312616866

Technical Advice: dave@kote.co.za

Admin: kels@kote.co.za

Kote[®]

Working for our customers success!